




Novoband Access



Novoband Access is a profile made of natural aluminum designed to be installed as an element of guidance for people with visual disabilities within the Emac®'s Universal Accessibility and Safety System. This profile is easy to install on finished floorings. Highly resistant, allows intense traffic and serves not only as an element of guidance for the disabled but also to warn of potential dangers.

General Features

Material:	Natural aluminum
Length:	2 ml

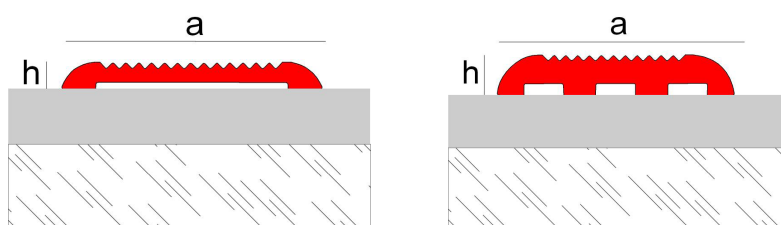

Reference	Width (a):	Height (h):
NPLEAL3NA	30 mm	3,1 mm
NPLEAL5NA		5,1 mm

Applications

Novoband Access are bands made of aluminum designed to be installed as an element of guidance for people with visual disabilities.

Are available in 3 and 5 mm heights to make easier their installation fulfilling the standards of several countries both outdoors and indoors.

Suitable to be installed in accesible environments where tactile contrast is required. Novoband Access is part of the solutions offered within the Emac®'s Universal Accessibility and Safety System.

Materials

Novoband Access is a solution made of natural aluminum.

The aluminum is a raw material with excelent chemical, physical and mechanical properties. It is light, tough, ductile, maleable and highly durable.


Technical Features and tests

Alloy	6063 L-3441	AA y ASTM. UNE 38-301-89
Fire resistance	M0	UNE 23-727-90
Abrasion resistance	Very good	

Installation

Novoband Access is supplied in 2 m long profiles and can be cut-to-size in situ. To install the bands it will be enough by applying adhesive on the bottom of the profiles, placing them to the desired position and putting pressure to guarantee the optimal adhesion. Under request it can be delivered with holes for the fixing with screws (not supplied).

There is a fitting template available in option to install the bands according to several standards.



Cleaning and maintenance

Novoband Access resists water and detergents. The cleaning must be done with a neutral liquid cleaner or specific cleaner diluted. In case of doubt always dilute the liquid cleaner and first try in a small and less visible area.

For Novotop aluminum do not use steel wool, abrasive cleaners, souring products, strong acids (hydrochloric and perchloric), strong bases (caustic soda or ammonia) or carbonated solutions. Citric acid is neither recommended because dissolves the protective layer of the surface of aluminium. Waxes, petrolatum, lanolin or similar substances are not appropriate. Solvents containing haloalkanes (hydrofluoroether and chlorinated solvents) and curing accelerators containing chlorides should not be used (use special accelerators free of chlorides).

Technical information

You can find out more information about the technical features of the Emac®'s products by downloading its Technical Files in **www.emac.es**.

If you have any query, please contact our Technical Department in **tecnico@emac.es**.



Outdoors



Indoors



Floorings